

50W 8500LM AYDON IP69K LIVESTOCK TRI-PROOF

6000K & SWITCHABLE 6000K/RED DIFFUSED

HIGH QUALITY
CONSTRUCTION
OF ALUMINIUM
& PMMA

IP69K WATER
INGRESS
AMMONIA &
IMPACT
RESISTANT


ALUMINIUM
HEATSINK FOR
RAPID HEAT
DISSIPATION

SUITABLE FOR
PIGS, SHEEP,
HORSES
& CATTLE

ALL METAL
FITTINGS
ANTI-AMMONIA
316 STAINLESS
STEEL

5 YEAR
TOTAL
PRODUCT
WARRANTY

GL7600 6000K

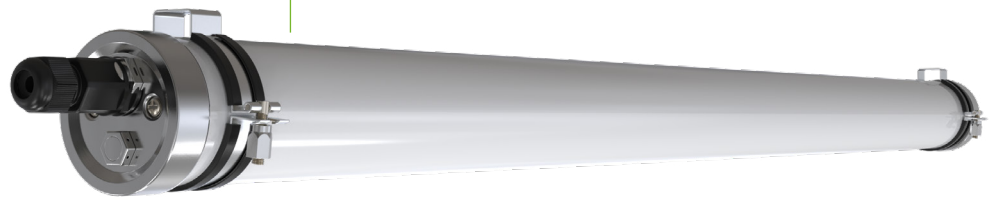

GL7600 6000K



GL7602 6000K + RED



Mounting Brackets



Suspension Hooks



Suspension Kit



50W 8500LM AYDON IP69K LIVESTOCK TRI-PROOF 6000K & SWITCHABLE 6000K/RED DIFFUSED

FEATURES AND BENEFITS

- IP67 & IP69K & IK10
- PMMA IK10
- Anti-ammonia
- Withstands water pressure of 100bar (1450psi) and temperature of 80°C
- System efficiency up to 170Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 120°
- 5 years warranty
- Quick start instant 100% luminous flux
- Surface mount or suspension mount

PRODUCT INFORMATION

Power: 50W

Input Voltage: 100-277VAC (50/60Hz)

Input Current: 0.23A@220VAC

PF: 0.90@220VAC

Dimming Option: 0-10V

CCT: 6000K

Luminous Flux: 8500Lm

Efficiency: 170Lm/W±5% (Ra>80)

LED Brand: Lumileds

Beam Angle: 120°

Operation Temp: -20°C~+40°C

Storage Temp: -20°C~+60°C

Life Span: Ta 40°C L70>54000 hours

IP Class: IP67 & IP69K

IK Class: PMMA, IK10

Certificate: CE, RoHS, CB, IK10, IP69K, ENEC, RCM, SAA, DLG, ETL

Lamp Body Colour: PMMA Housing & 316 Stainless Steel
End Caps Diffused

Product Size (mm): 1452 x Ø75


PRODUCT VARIATIONS

GL7600 50W Aydon LED Tri-proof Light, IP69K IK10, 6000K, Surface Mounting Brackets (2pcs): 316 stainless steel


GL7602 50W Aydon LED Tri-proof Light, IP69K IK10, 6000K/Red Switchable, Surface Mounting Brackets (2pcs): 316 stainless steel

FIXING OPTIONS


Linkable Installation



Surface Mount



Suspension Mount



50 WATT	FLICKER FREE	IP 69K	IK 10	120°	INDOOR USE	OUTDOOR USE
LUMILEDS	CRI 80	PF 0.9	DIMMABLE	L70 TESTED		
		UK CA				